



## Desktop 4 LAN Ports Network Appliance with Intel® Celeron® Processor N3350

Front View

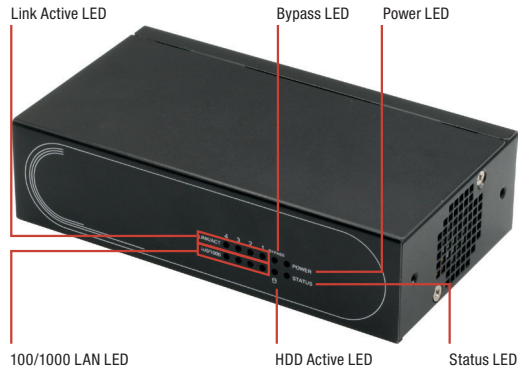

Rear View

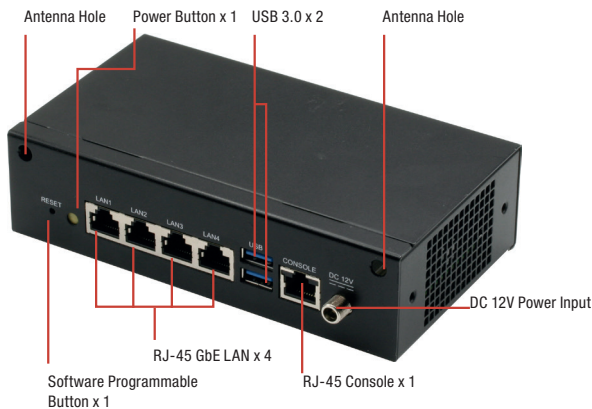

## Specifications

System	
Form Factor	Desktop Network Appliance
Processor	Intel® Celeron® Processor N3350 SoC
Chipset	SoC
System Memory	Onboard LPDDR4 2GB memory
Network	
Ethernet	Intel® i211 GbE x 4
Bypass	1 pair bypass function
Display	
Graphic Controller	Intel® Integrated
Connector	—
Storage	
HDD	2.5" HDD Bay x 1
CF/CFast/mSATA	Onboard 8GB eMMC, SATA 6.0 Gb/s port x 1

## Features

- Desktop Network Appliance
- Intel® Celeron® Processor N3350
- Onboard LPDDR4 2 GB Memory
- Gigabit Ethernet x 4 (Intel® i211)
- 1 Pair Bypass
- Internal 2.5" SATA HDD Bay x 1
- Onboard 8 GB eMMC
- RJ-45 Console x 1
- USB 3.0 x 2



## Internal/ Expansion Interface

PCIe Slot	—
Mini-PCIe Slot	—
KB Mouse	—
USB	USB 3.0 x 2

## Miscellaneous

RTC	Internal RTC
Watchdog Timer	1~255 steps by software programmable
TPM	(TPM v1.2 9660/TPM2.0 9665 Optional)
GPIO	4 bits input, 4bits output optional
Fan	1
MTBF (Hours)	166,000
Color	Black

## Environmental Parameters and Dimension


Power Requirement	12V DC Power
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10%~80% relative humidity, non-condensing
Storage Humidity	10%~80% @40°C; non-condensing
Vibration	0.5 Grms/ 5 ~ 500Hz / operation (2.5" HDD) 1.5 Grms/ 5 ~ 500Hz / non operation
Shock	10 G peak acceleration (11 m sec. duration), operation 20 G peak acceleration (11 m sec. duration), non operation
Dimension (W X D X H)	6.5" x 3.62" x 1.57" (165mm x 92mm x 40mm)

## I/O

Front Panel	Power LED x 1 Status LED x 1 HDD Active LED x 1 Bypass LED x 1 LAN LEDs x 8
Rear Panel	USB 3.0 Port x 2 RJ-45 Port x 4 RJ-45 Console x 1 12V DC Power Input x 1 Software Programmable Button x 1 Antenna Hole x 2 Optional

## Dimension

Unit: mm

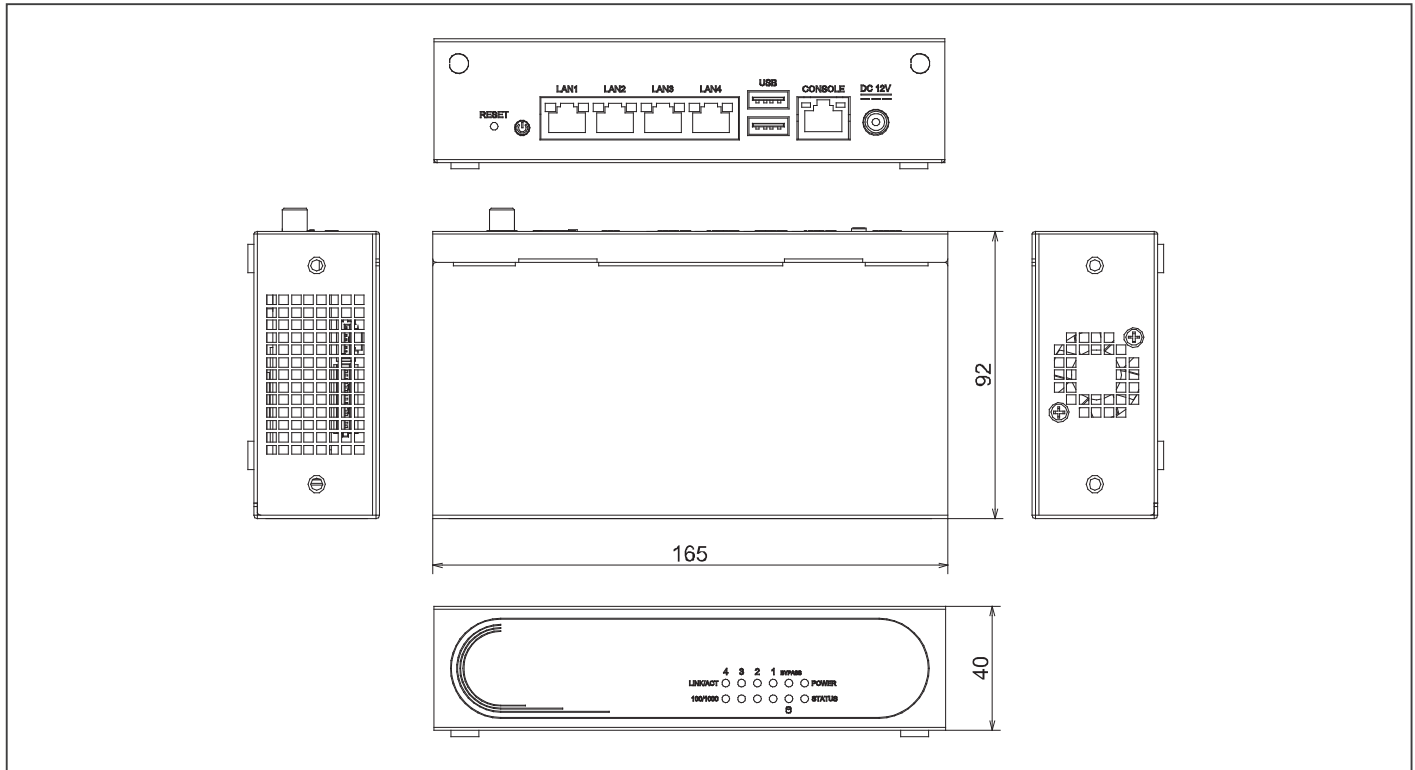

## Ordering Information

Part Number	CPU	Memory	Mini-Card Slot	Storage	Display	LAN	USB	Console	Bypass	TPM	Fan	Mounting	Power	Note
FWS-2276E4-A10-A10-000	Intel® Celeron® N3350	Onboard LPDDR4 2GB memory	—	2.5" HDD Bay x 1 Onboard 8GB eMMC	—	Intel® i211 GbE x 4	USB 3.0 x 2	RJ-45 console x 1	1 pairs	—	1	Desktop	DC	* Please contact AAEON for other optional specifications.

## Packing List

- SATA Cable x 1
- SATA Power Cable x 1
- Power Adapter
- FWS-2276

## Optional Accessories

- **1700091805**  
Console Cable
- **1702031802**  
Power Cord, 3P-250V/10A, 180D, 1.8M, USA, YP22/YP12
- **1702031803**  
Power Cord, 3P-250V/10A, 180D, 1.8M, VDE, YP22/YP12
- **170203180B**  
Power Cord, 3P-250V/10A, 180D, 1.8M, China, YP-03/YC-12
- **170203180E**  
Power Cord, 3P-250V/10A, 180D, 1.8M, PSE, YP12/YC-12